



VEGA


A D F 1 6 0 • 2 0 0 • 2 4 0 • 2 9 0

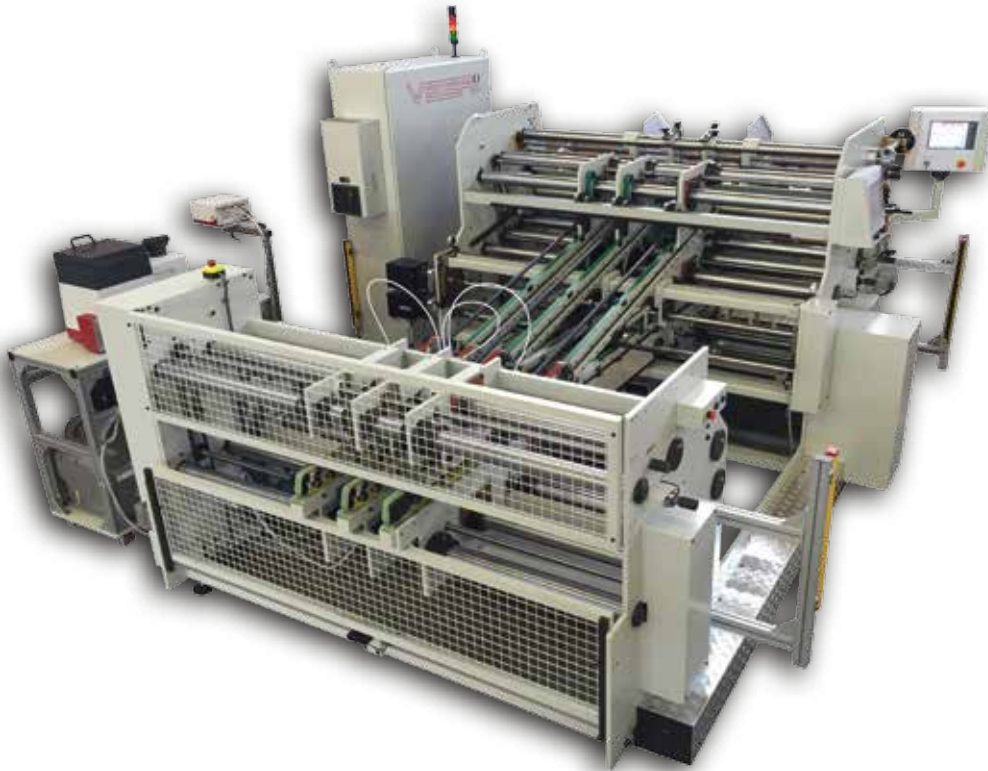



DOPPIO INTRODUTTORE PER PIEGATRICE-INCOLLATRICE
PER SCATOLE IN CARTONE TESO E ONDULATO
DOUBLE FEEDER FOR FOLDING AND GLUING MACHINE
FOR SOLID AND CORRUGATED BOARD BOXES

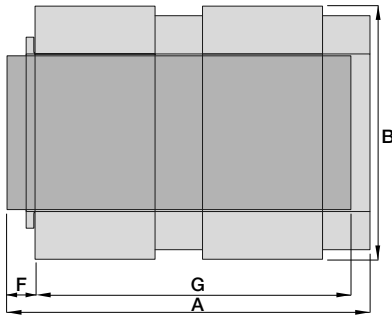


		VEGA 160	VEGA 200	VEGA 240	VEGA 290
		min mm	MAX mm	MAX mm	MAX mm
A	435	1620	2020	2420	2920
B	200	1400	1400	1400	1400
F	40	100	100	100	100
G	400	1480	1880	2280	2780

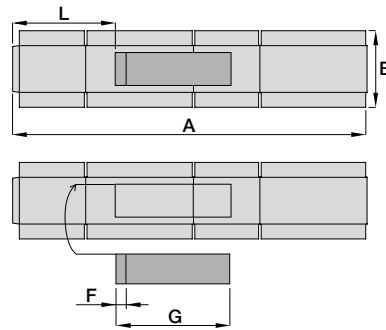


		VEGA 160	VEGA 200	VEGA 240	VEGA 290
		min mm	MAX mm	MAX mm	MAX mm
A	435	1620	2020	2420	2920
B	200	1400	1400	1400	1400
F	10	40	40	40	40
G	200	700	900	1100	1350

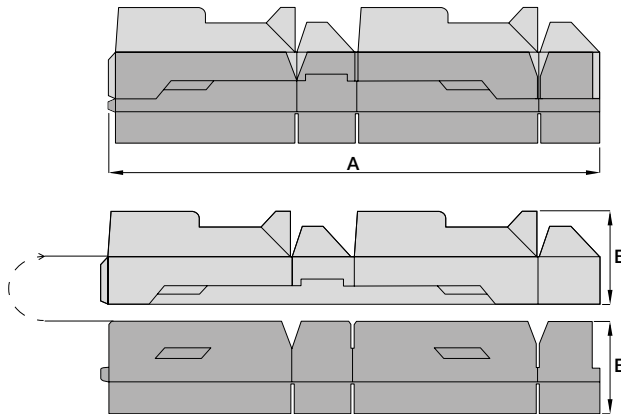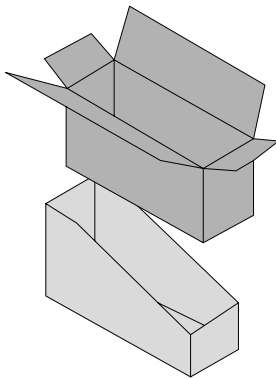


		VEGA 160	VEGA 200	VEGA 240	VEGA 290
		min mm	MAX mm	MAX mm	MAX mm
A	435	1620	2020	2420	2920
B	200	1400	1400	1400	1400

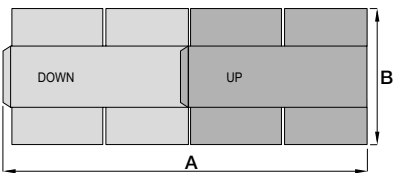


		VEGA 160	VEGA 200	VEGA 240	VEGA 290
		min mm	MAX mm	MAX mm	MAX mm
A	515	1620	2020	2420	2920
B	200	1400	1400	1400	1400

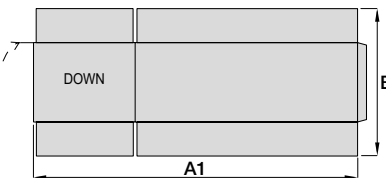

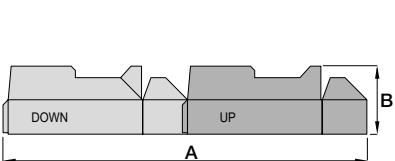

		VEGA 160	VEGA 200	VEGA 240	VEGA 290
		min mm	MAX mm	MAX mm	MAX mm
A1	400	1400	1800	2200	2700
A1*	-	1300	1800	1800	1800
B	200	1400	1400	1400	1400
B**	-	2100	2100	2100	2100


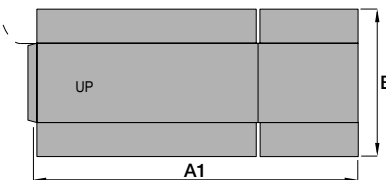


		VEGA 160	VEGA 200	VEGA 240	VEGA 290
		min mm	MAX mm	MAX mm	MAX mm
A	615	1620	2020	2420	2920
B	200	1400	1400	1400	1400



*Con raccoglitrice Altair
**Senza piegaincollatrice
*With Altair collector
**Without folder-gluer

Caratteristiche tecniche / Technical Data		ADF 160	ADF 200	ADF 240	ADF 290
Fustellato aperto / Open blank	max mm	1620	2020	2420	2920
	min mm	435	435	435	435
Altezza / Blank length	max* mm	2100	2100	2100	2100
	max mm	1400	1400	1400	1400
	min mm	200	200	200	200
Materiale lavorato / Convertible material	 	g/m ² 500 ÷ 1500 N-F-E-B-C-A-K-EB-BC			
Velocità / Speed	m/min	20 ÷ 200			
Motore a velocità variabile / Variable speed motor	kW	max 11			
Aria compressa / Compressed air	bar	6			
Peso netto / Net weight	kN	95	100	105	120
*Senza piega incollatrice / *Without folder-gluer					

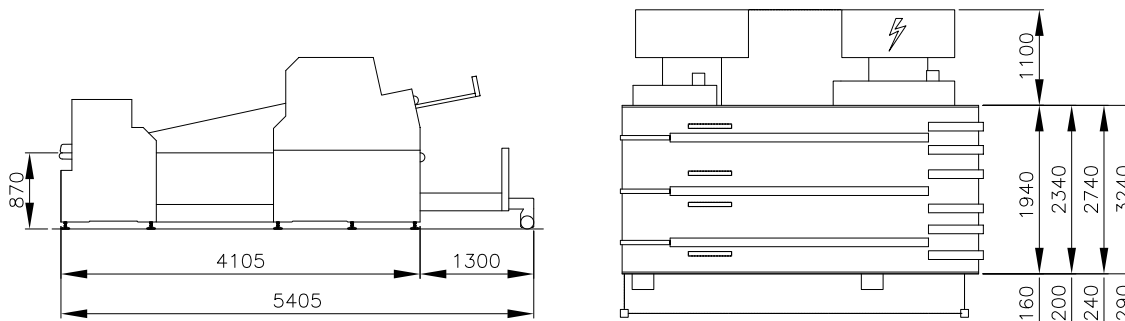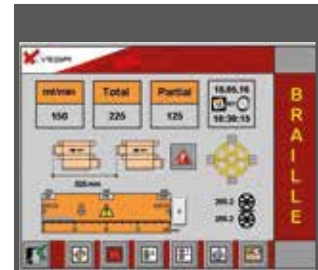



A D F 1 6 0 • 2 0 0 • 2 4 0 • 2 9 0

Il doppio introduttore Vega ADF espande le potenzialità della Vostra piega incollatrice attraverso un doppio banco di introduzione. Può essere integrato o abbinato alla linea e per questo viene fornito con spostamento motorizzato su binario. Gli assi sono motorizzati e computerizzabili per una rapida impostazione. Tutti i registri che regolano la precisione di abbinamento dei fustellati superiori rispetto agli inferiori sono computerizzati per una rapida messa a punto. I banchi sono aspiranti e motorizzati indipendentemente.

The Vega ADF Double Feeder increases the performance of your folder gluer by means of a double feeding bench. It can be integrated or coupled at the complete line and that is why it is supplied with a motorized movement on rails. The axes are motorized and they can be computerized for a quick set-up. All the registers which adjust the precise coupling of the upper blanks compared to the lower ones are computerized for a quick set up. The two vacuum benches are independently motorized.



MACCHINE PER CARTOTECNICA
SOLID AND CORRUGATED BOARD MACHINES



VEGA S.R.L .

VIALE DELL'INDUSTRIA, 6 ▪ 20037 PADERNO DUGNANO ▪ MILANO ▪ ITALY
TEL. +39 02 99046212 ▪ FAX +39 02 99046202
COMM@VEGAGROUP.IT ▪ WWW.VEGAGROUP.IT